


VIKING**Electric Phonograph**


For Operation on 110-120 Volts A.C. Cycle as marked.

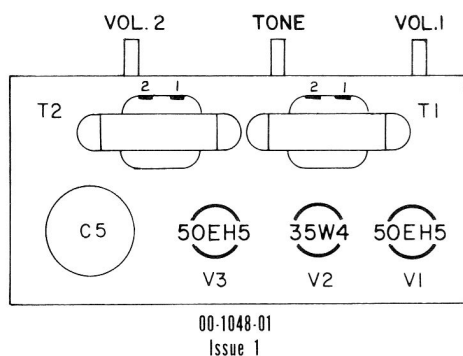

SPECIFICATIONS

Maximum Power Output.....3 Watts
 Power Consumption.....46 Va.

SPEAKER CONNECTIONS

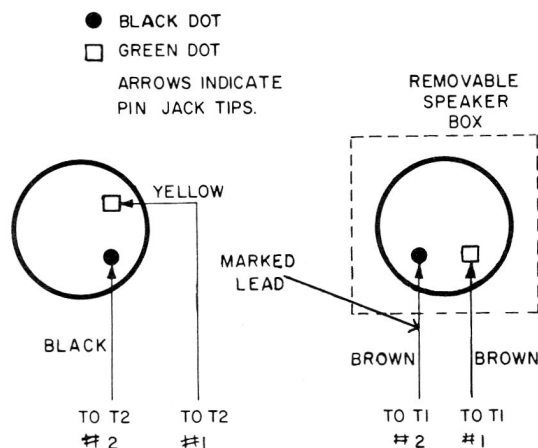

SERVICE REPLACEMENT PARTS LIST - PAPS-512, PAPS-512AR

FINAL ASSEMBLY

Part No.	Description
12-19991-51	Portable Phonograph Case - 2 Tone Grey
12-19991-52	Portable Phonograph Case - Blue and Grey
13-68-10	Motor Board (25 cycle only on PAPS-512AR)
13-147-01	Curtain
19-40003-01	4" PM Speaker - 3.2 ohm VC
13-133-03	Motor Board - (PAPS-512AR only)
53-408-11	Knob
53-497-02	Viking Trim Strip

CHASSIS ASSEMBLY

Symbol	Part No.	Description
R1,4	41-31-07	Control - Level - 1 meg.
R2,3	41-154-01	Control - Dual - Tone - 25K
C3	44-40-04	Electrolytic - Miniature - 50 ufd x 25V
C5	44-106-01	Electrolytic - Dual - Insulated 80, 30 ufd x 150V
T1,2	24-80046-01	Output Transformer 3.2 ohm VC

CHANGER ASSEMBLY

Part No.	Description
16-90017-05	Changer BSR UA10 (PAPS-512 and 25 cycle PAPS-512AR)
16-250017-05	Astatic 76TSB Replacement Cartridge
16-120028-02	78 Replacement Stylus - Astatic N8-3S
16-120028-03	LP Replacement Stylus - Astatic N8-7S
16-220002-01	25 cycle motor alliance
16-120045-02	50 cycle rotor assembly
16-90019-02	BSR UA14 Changer Assembly (PAPS-512AR 50 and 60 cycle models)

All information printed in this leaflet is up to date as of Feb.15, 1962. Subsequent changes are covered by bulletin.

When writing for Service Information and/or parts, please quote model and Serial Number as found on the license label. Always order service parts by part number. Part numbers are positive identification which ensures fast service and avoids unnecessary delays.

THE T. EATON CO. LIMITED
 CANADA



RESISTORS: HALF WATT UNLESS OTHERWISE NOTED

CONDENSERS : T = TUBULAR, FOLLOWED BY CAPACITY IN MFD. AND D.C.W.V.
E = ELECTROLYTIC, " " " " " "
C = CERAMIC, " " " " " "