

Service Information and Parts List


for the Model

VIKING PAPS-645 Electric Phonograph

PAPS-645

For Operation on 110 - 120 Volts A.C. Cycle as marked.

All information printed in this leaflet is up to date as of June 22, 1963. Subsequent changes are covered by bulletin.

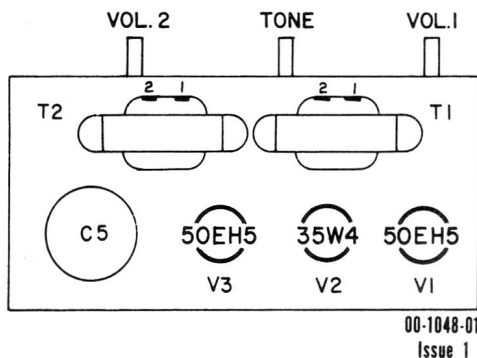

SPECIFICATIONS

Maximum Power Output 3 Watts
 Power Consumption39A

SERVICE REPLACEMENT PARTS LIST PAPS-645

FINAL ASSEMBLY

Part No.	Description	Part No.	Description
12-25150-51	Portable Phonograph Case - Olive and Sand	16-120047-01	45 R.P.M. Inserts
13-191-04	Motor Board	19-50003-06	5" P.M. Speaker - 3.2 ohm VC
13-194-01	Curtain	53-624-05	Knob - Volume
16-120045-02	50 cycle rotor (50 cycle models only)	53-624-06	Knob - Tone
		53-614-01	Viking Trim Strip

CHASSIS ASSEMBLY

Part No.	Description	Part No.	Description
41-31-07	Control - Volume - 1 meg.	24-80046-01	Output Transformer 3.2 ohm VC
41-154-01	Control - Dual - 25K	44-106-01	Electrolytic - Dual 80-30 mfd. x 150V

CHANGER ASSEMBLY

Part No.	Description	Part No.	Description
16-100014-02	VM Changer (25 cycle models only)	16-250017-11	Replacement Cartridge - Astatic 70TS
16-80001-02	VM Changer (50 cycle models only)	16-120028-02	78 Replacement Stylus - Astatic N8-3S
16-90027-02	VM Changer (60 cycle models only)	16-120028-03	LP Replacement Stylus - Astatic N8-7S

CAUTION FOR SERVICEMAN

Any serviceman working with this chassis when it is out of the cabinet should take special care not to come in contact with any ground connections.

When writing for Service Information and/or parts, please quote model and Serial Number as found on the license label. Always order service parts by part number. Part numbers are positive identification which ensures fast service and avoids unnecessary delays.

EATON'S OF CANADA

