

SERVICE INFORMATION AND PARTS LIST


PAPS 792

for the

VIKING ELECTRIC PHONOGRAPH

For operation on 110-120 Volts A.C. Cycle as marked

All information printed in this leaflet is up to date as of January 26, 1966.
Subsequent changes are covered by bulletin.

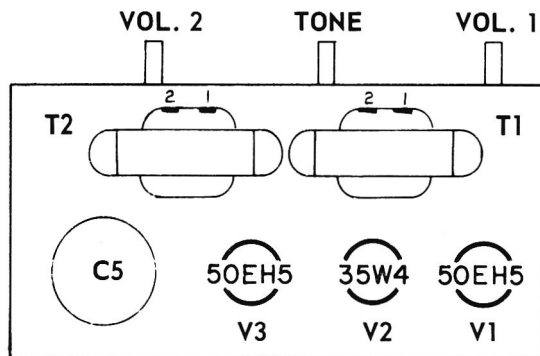

SPECIFICATIONS

Maximum Power Output 3 Watts
Power Consumption39A @ 117V

00-1048-01
Issue 1

SERVICE REPLACEMENT PARTS LIST

FINAL ASSEMBLY

Part No.	Description
12-25490-51	Portable Phono Case - Woodgrain and Charcoal
13-234-01	Motor Board
13-233-01	Curtain
16-90042-01	VM Changer - 60 cycle - model 1288
16-250029-03	Replacement Cartridge - Astatic 142
16-120064-01	Replacement Styli - Astatic N60
19-40017-01	Speaker - 5" PM 4 ohm VC
53-748-11	Knob

CHASSIS ASSEMBLY


Symbol	Part No.	Description
R1, R2	41-215-11	Control - Volume - 1 meg.
R3, R4	41-218-12	Control - Dual - Tone - 25K
C5	44-202-01	Electrolytic - 80, 30 ufd 150V
T1, T2	24-80046-01	Audio Output Transformer

CAUTION FOR SERVICEMEN

Any serviceman working with this receiver when it is out of the cabinet should take special care not to come in contact with any ground connections.
When writing for Service Information and/or parts, please quote model and Serial Number as found on the license label. Always order service parts by part number. Part numbers are positive identification which ensures fast service and avoids unnecessary delays.
When writing for installation items, please quote cabinet colour.

EATON'S OF CANADA



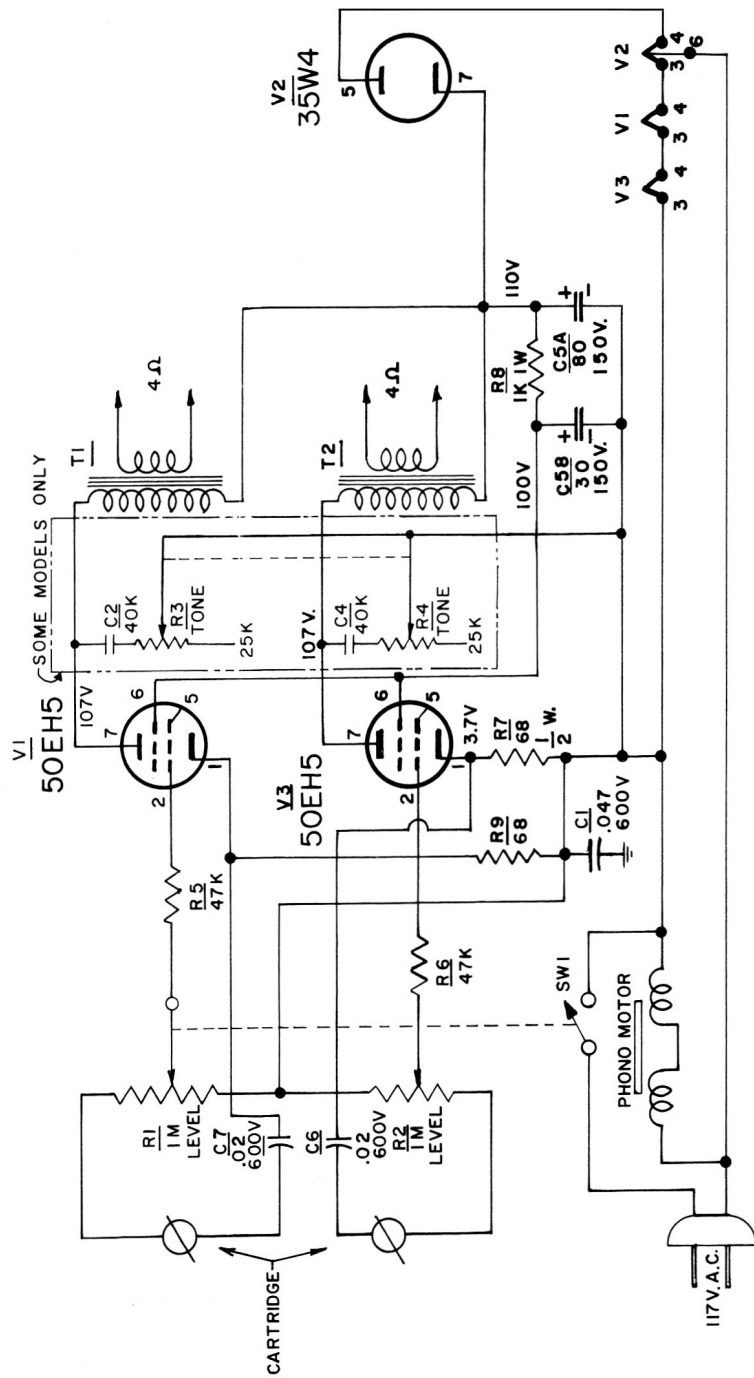

LEGEND
RESISTORS
 HALF WATT UNLESS OTHERWISE NOTED.
 10% TOLERANCE UNLESS OTHERWISE NOTED.
CAPACITORS
 TUBULAR, CAPACITY IN μ fd., AND D.C.W.V.
 CURVED LINE, OUTSIDE FOIL.
 ELECTROLYTIC, CAPACITY IN μ fd. AND D.C.W.V.
 CERAMIC, MICA, OR OTHER TYPES WITH NO
 OBVIOUS OUTSIDE OR GROUNDED SIDE.
 CAPACITY IN μ fd., TOLERANCE IF CRITICAL
 AND D.C.W.V.
 K = 1,000
 M = 1,000,000