


# VIKING Service Information for "RM-237"

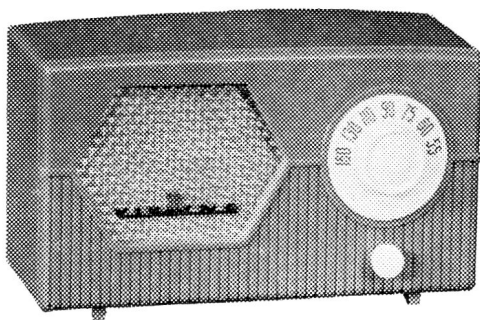

## SPECIFICATIONS

Standard Broadcast Range ..... 540 Kc — 1650 Kc  
 Intermediate Frequency ..... 455 Kc  
 Power Consumption ..... 30 Watts  
 Undistorted Output ..... 700 mw  
 Maximum Power Output ..... 1.1 Watts

<b>12BA6</b>			
<b>TUBE LOCATIONS</b>			
<b>50C5</b>	<b>112AV6</b>	<b>12BE6 Gang</b>	<b>35W4</b>

● Volume Control

**Power supply: 105-125 Volts A.C., 25-60 Cycles or 105-125 Volts D.C.**

When writing for Service Information or Parts, please quote Model Number, Serial Number and finish of cabinet.

### CAUTION FOR SERVICEMEN

Any serviceman working with this receiver when it is out of the cabinet should take special care not to come in contact with any ground connections.

## SERVICE REPLACEMENT PARTS LIST

- G-574-2.....Triple Electrolytic
- K1427.....4" P.M. Speaker Assembly
- K-1446-1.....Line Cord and Plug Assembly
- K-1445-1.....Heyco Strain Relief Bushing
- K-1503.....Printed Circuit
- LK-422-10.....Output Transformer
- P-2438-1.....B.C. Osc. Coil
- P-2485R.....I.F. Transformer (1st and 2nd)
- P-2788.....Loop Antenna Assembly
- R-307-5.....Vol. Control with Switch
- V-364-2.....Gang Condenser

## INSTALLATION

Cabinet	Tuning Knob	Vol. Control Knob	Baffle	Grille
A-2833-1 Ivory	N-384-4	N-385-1	A-2612	C-980
A-2833-2 Brown	N-384-4	N-385-1	A-2612	C-980
A-2833-3 White	N-384-5	N-385-2	A-2612	C-980
A-2833-4 Dark Green	N-384-4	N-385-1	A-2612	C-980
A-2833-5 Bright Red	N-384-4	N-385-1	A-2612	C-980

**THE T. EATON CO. LIMITED**  
 C A N A D A

