


VIKING RM-276, RM-276R

ALIGNMENT AND SENSITIVITY

SIGNAL GENERATOR MODULATED 30% AT 400 CY.

STEP	APPLY SIGNAL		THRU SERIES DUMMY	SET GANG AT	ADJUST FOR MAX. OUTPUT	NOMINAL SENSITIVITY FOR 50 MILLIWATTS OUTPUT
	AT KC.	TO				
1	455	12BA6 #1 PIN	.05	MINIMUM CAPACITY	2ND. I.F	1600 μ V.
2	455	12BE6 #7 PIN	.05	MINIMUM CAPACITY	1ST. I.F 2ND. I.F.	75 μ V.
3	1460	ANT.	400 Ω	1460	OSC. TRIM. ANT. TRIM.	14 μ V.
4	1625	ANT.	400 Ω	MINIMUM CAPACITY	CHECK ONLY	—
5	600	ANT.	400 Ω	600	CHECK ONLY	22 μ V.
6	525	ANT.	400 Ω	MAXIMUM CAPACITY	CHECK ONLY	—

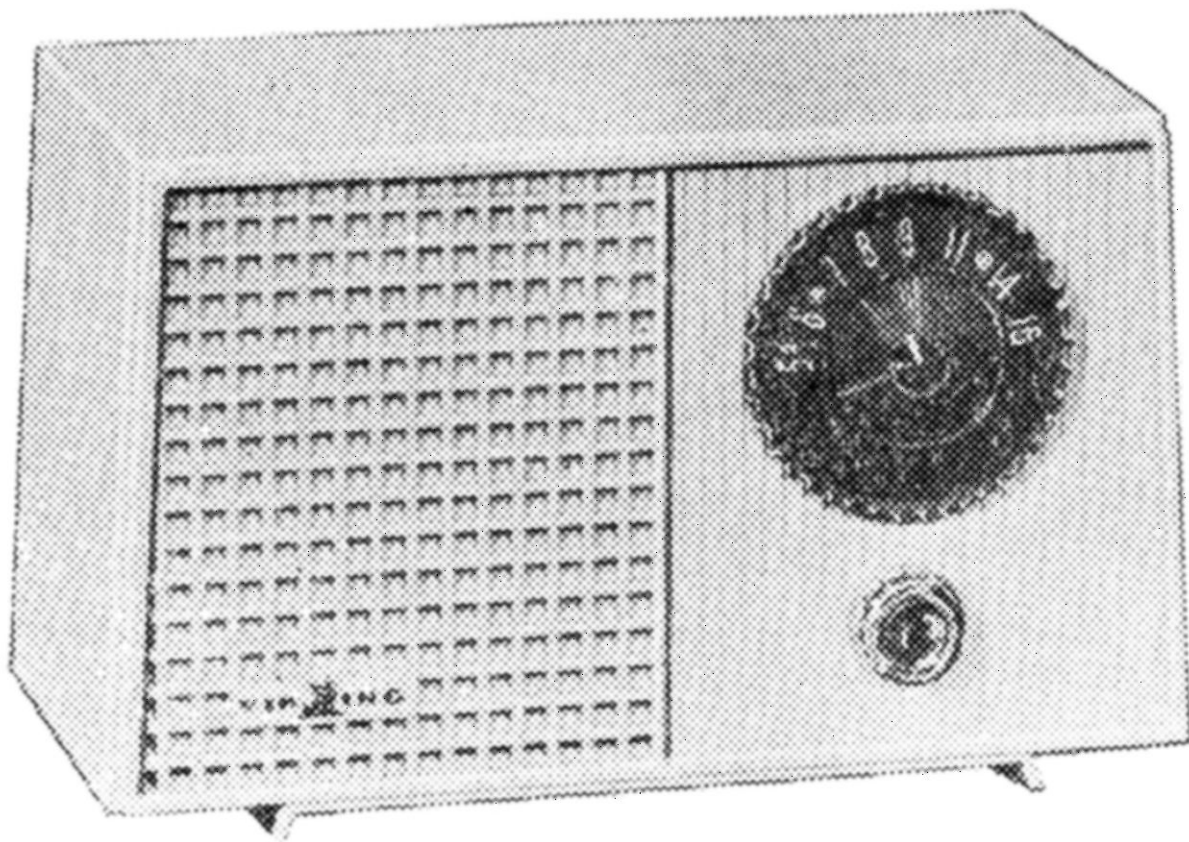

VIKING RM-276, RM-276R