


VIKING Service Information for "RM-276R"

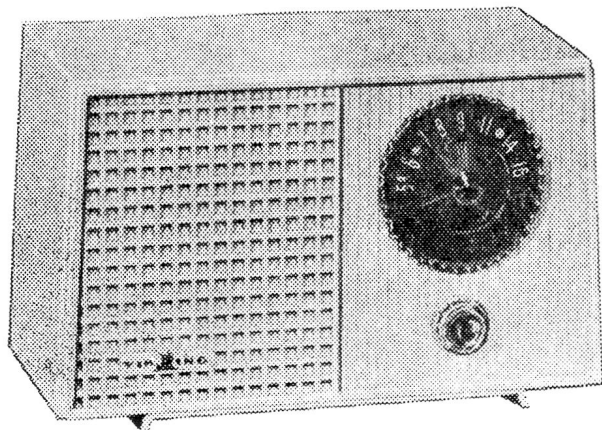

SPECIFICATIONS

Standard Broadcast Range 540 Kc — 1650 Kc
Intermediate Frequency 455 Kc
Power Consumption 30 Watts
Undistorted Output 750 mw
Maximum Power Output 1.5 Watts

12BE6	35W4
Rear of Gang	
50C5	
12BA6	12AV6
Rear of Vol. Control and switch.	

Power supply: 105-125 Volts A.C., 25-60 Cycles or 105-125 Volts D.C.

When writing for Service Information or Parts, please quote Model Number, Serial Number and finish of cabinet.

CAUTION FOR SERVICEMEN

Any serviceman working with this receiver when it is out of the cabinet should take special care not to come in contact with any ground connections.

SERVICE REPLACEMENT PARTS LIST

G-665.....Electrolytic 80 and 30 ufd x 150 DC WV
10 ufd x 25 DC WV
K-1446-1.....Line Cord & Plug Assembly 6' — Ivory
K-1503.....Printed Circuit — Audet
K-1427-6.....Speaker — 4" P.M.
LK-582-4.....Output Transformer 3.2 ohm V.C.
P-2977-1.....BC Osc. Coil
P-2923.....I.F. Transformer (1st and 2nd)
P-2976.....Rod Antenna Assembly
R-450-1.....Volume Control & AC Switch
V-398-1.....Gang Condenser

INSTALLATION

A-3043-1.....Cabinet — Brown
A-3043-2.....Cabinet — Ivory
A-3043-6.....Cabinet — Light Grey
A-3043-7.....Cabinet — Olive Green
A-3043-8.....Cabinet — Yellow
N-503-2.....Knob—Calibrated (use with all colours of
cabinets except white)
N-504-1.....Knob Volume Control

THE T. EATON CO. LIMITED
C A N A D A

