


VIKING Service Information for MODEL RMB-238

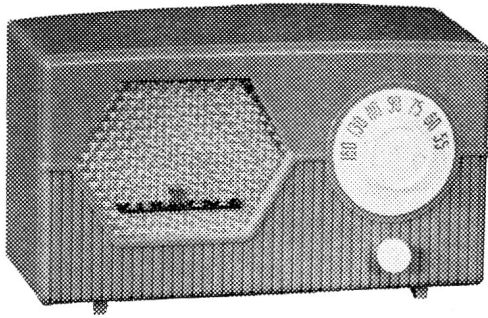


SPECIFICATION

Tuning Range 540 Kc. - 1640 Kc.
 Intermediate Frequency 455 Kc.
 Undistorted Power Output 125 mw.
 Maximum Power Output 250 mw.
 "A" Battery, 1.5 Volts—Average Drain25 Amps.
 "B" Battery, 90 Volts—Average Drain 11.0 ma.

| | |
|-------|---------|
| TUBES | 1U4 |
| 3V4 | 1U5 1R5 |

When writing for service information, please quote Viking Model, and Serial Number as shown.

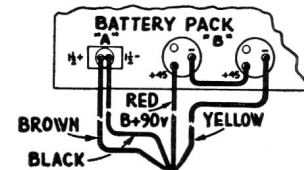

ANT. LEAD—BLUE
 GND. LEAD—BLACK

FOR ALIGNMENT AND SENSITIVITY DATA SEE SCHEMATIC

SERVICE REPLACEMENT PARTS LIST

- G-332.....4 ufd. 100V. Electrolytic
- K-386....."B" Battery Plug
- K-801....."A" Battery Plug
- K-1427.....4" P.M. Speaker Assembly
- LK-423-5.....Output Transformer
- P-2277-1.....B.C. Ant. Coil
- P-2438-2.....B.C. Osc. Coil
- P-2636.....I.F. Trans. (1st and 2nd)
- R-316-2.....Vol. Control and Switch
- V-364-2.....Gang Condenser

INSTALLATION

- A-2833-1.....Ivory Cabinet
- A-2833-2.....Brown Cabinet
- A-2833-3.....Dark Green Cabinet
- A-2612.....Baffle
- C-980.....Grille
- N-384-4.....Knob — Tuning
- N-385-1.....Knob — Volume

THE T. EATON CO. LIMITED
 C A N A D A

