




VIKING Service Information for Model

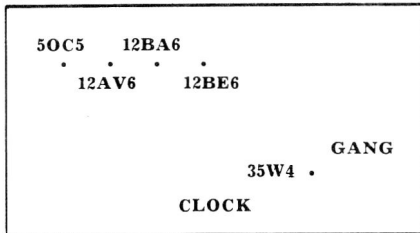

VOLUME TUNING



CALIBRATION POINTS ON CHASSIS SKIRT

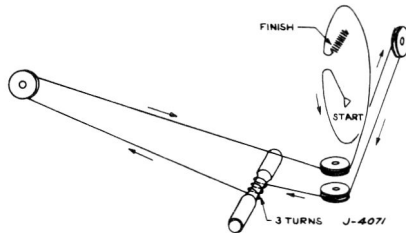

REMOVAL OF CLOCK

- Remove: (1) Tuning & Volume Control "Push-On" type knobs.
- (2) The clock "Push-On" type knobs.
- (3) Chassis retaining screws (2) and back mounting screws (2).
- (4) Slide Chassis from cabinet and remove the plug from chassis socket.
- (5) Remove two nuts holding clock retaining bracket.

NOTE:

Should it be necessary to ship the clock separately at any time, make certain that it is properly packed to withstand transportation and so that the clockhands, time set shaft, etc., are not subject to strain.

SERVICE REPLACEMENT PARTS LIST

- A-4046.....Dial Scale
- G-568-6.....Triple Electrolytic
- K-1832.....Clock — 60 cycle
- K-1833.....Clock — 25 cycle
- K-1439-2.....Line Cord and Plug Assembly
- K-1847.....Pointer
- K-1503.....Audet Printed Circuit
- K-1427-10.....Speaker — 4" P.M.
- K-1427-11.....Speaker — 4" P.M.
- P-2438-1.....B.C. Oscillator Coil
- P-2923.....I.F. Transformer (1st and 2nd)
- P-3054.....Back and Loopstick Antenna Assembly
- R-305-4.....Volume Control
- V-372-5.....Gang Condenser

INSTALLATION

CABINET

Colour	Cabinet	Knob
Ivory	A-4036-1	N-533-1
Brown	A-4036-2	N-533-2
Green	A-4036-3	N-533-3
Coral	A-4036-4	N-533-4
Light Grey	A-4036-5	N-533-5

SPECIFICATIONS

- Tuning Range 540 Kc - 1640 Kc
- Intermediate Frequency 455 Kc
- Undistorted Power Output..... 750 mw.
- Maximum Power Output..... 1.5 Watt
- Power Consumption (Radio & Clock)..... 25 Watt

When writing for Service Information or Parts please quote Model Number, Serial Number and finish of cabinet.

FOR ALIGNMENT AND SENSITIVITY DATA SEE SCHEMATIC

**Power Supply: 105-125 Volts A.C.,
Cycle as Marked**

