


Rogers - 12-54
Majestic - 754
De Forest - "Yukon"

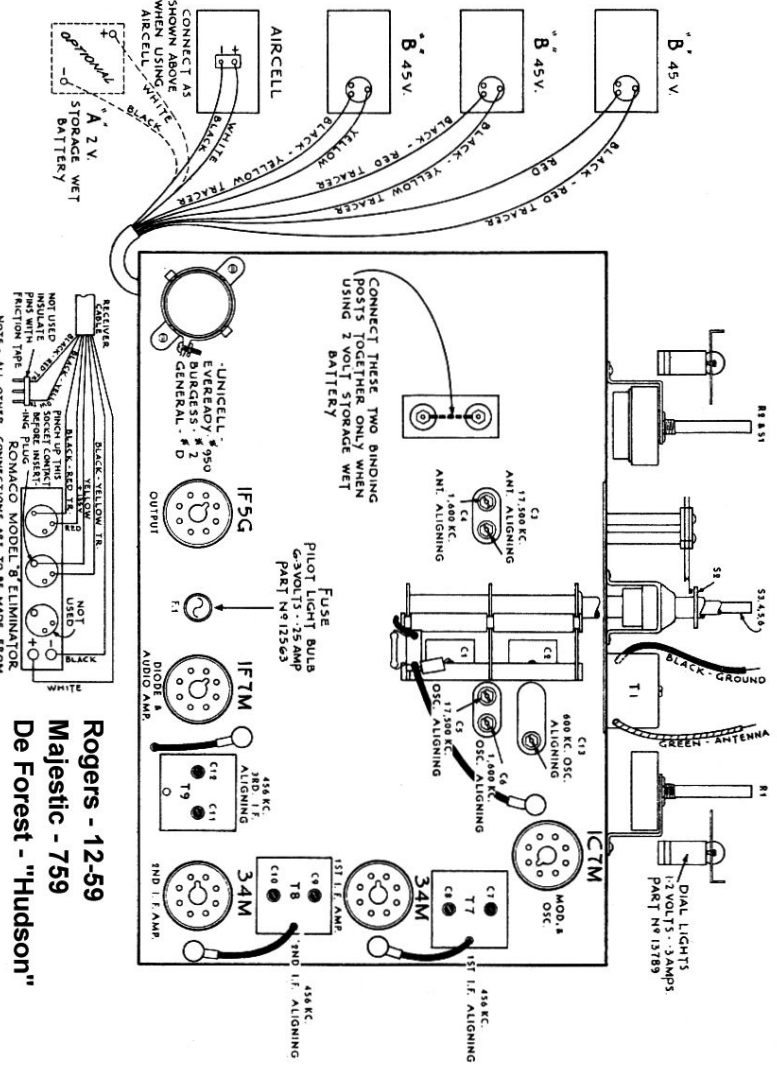

Rogers - 12-59
Majestic - 759
De Forest - "Hudson"

ALIGNMENT

Operation	Connect Generator	Set Generator Tuning	Set Receiver Tuning	Band Switch	Dummy Antenna	Volume Control	Adjust	Remarks
1	To Grid Cap of IC7M	456 kc/s.	700-800 kc/s.	Broadcast	.01 mfd.	Max.	C12, C11, C10, C9, C8, C7	To Peak I. F.
2	To Antenna (Green)	1600 kc/s.	1600 kc/s.	Broadcast	.0002 mfd.	Max.	C6	To Peak Osc.
3	To Antenna (Green)	1600 kc/s.	1600 kc/s.	Broadcast	.0002 mfd.	Max.	C4	To Peak Ant.
4	To Antenna (Green)	600 kc/s.	600 kc/s.	Broadcast	.0002 mfd.	Max.	C13*	To Peak Osc.
5	To Antenna (Green)	1600 kc/s.	1600 kc/s.	Broadcast	.0002 mfd.	Max.	C6	Recheck C6
6	To Antenna (Green)	17.5 mc/s.	17.5 mc/s.	Short-wave	400 ohms	Max.	C5	To Peak Osc.