

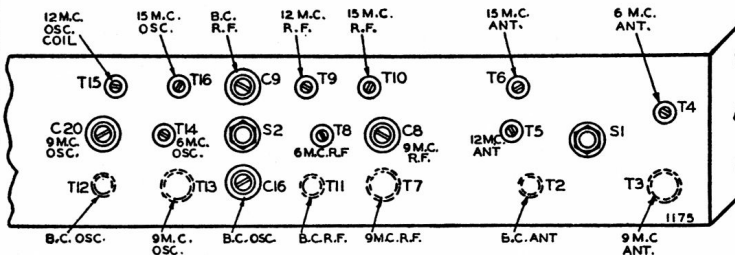
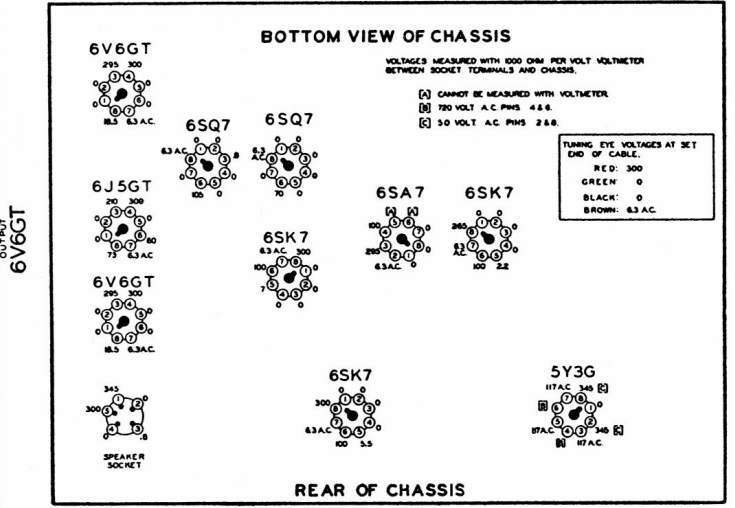


Belmont Radio Model 1100

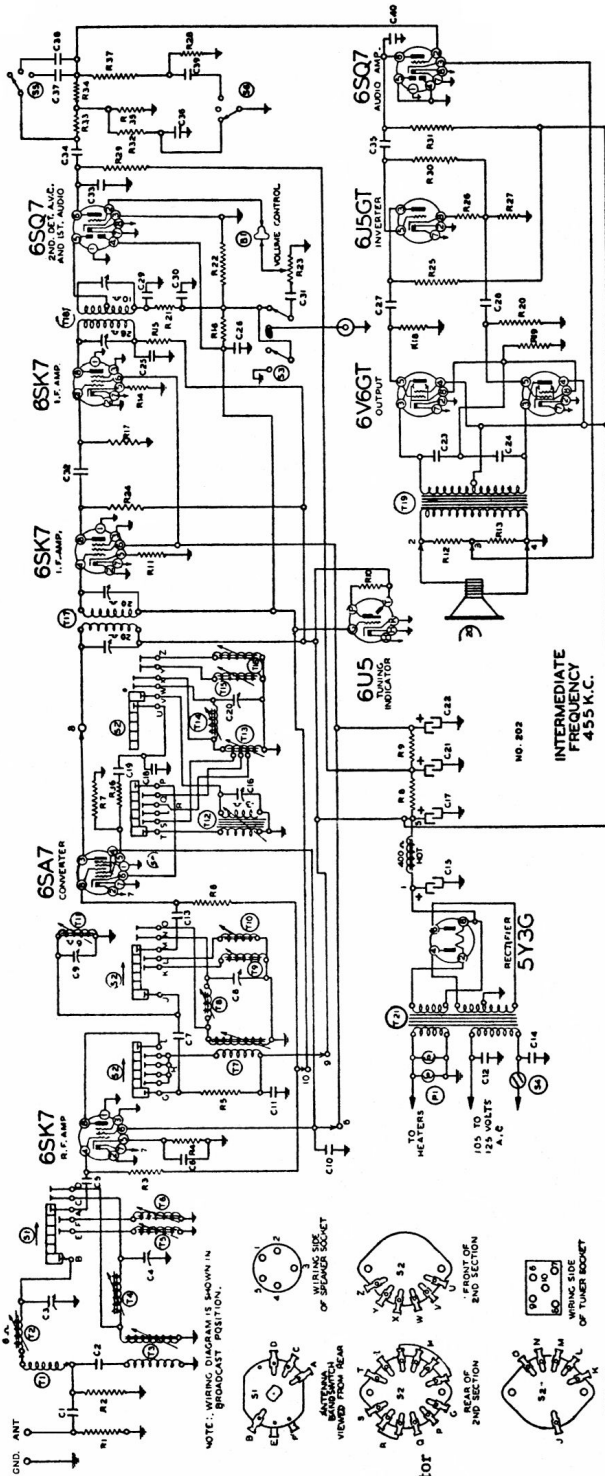

I.F. 455 Kc.

RESISTORS

- R1 130232 25M ohm- $\frac{1}{2}$ w.
- R2 130232 25M ohm- $\frac{1}{2}$ w.
- R3 130239 1 megohm- $\frac{1}{2}$ w.
- R4 130218 5M ohm- $\frac{1}{2}$ w.
- R5 130218 5M ohm- $\frac{1}{2}$ w.
- R6 130218 5M ohm- $\frac{1}{2}$ w.
- R7 130232 25M ohm- $\frac{1}{2}$ w.
- R8 130318 6M ohm-2 watt
- R9 130319 10M-2 watt
- R10 130200 1 megohm in tuning indicator
- R11 130820 700 ohm- $\frac{1}{2}$ w.
- R12 13082 10M ohm- $\frac{1}{2}$ w.
- R13 130235 1500 ohm- $\frac{1}{2}$ w.
- R14 130235 1500 ohm- $\frac{1}{2}$ w.
- R15 130192 2M ohm- $\frac{1}{2}$ w.
- R16 13019 1 megohm- $\frac{1}{2}$ w.
- R17 13020 100M ohm- $\frac{1}{2}$ w.
- R18 1303 500M ohm- $\frac{1}{2}$ w.
- R19 130317 250 ohm-2 watt
- R20 1303 500M ohm- $\frac{1}{2}$ w.
- R21 13020 100M ohm- $\frac{1}{2}$ w.
- R22 130238 400M ohm- $\frac{1}{2}$ w.
- R23 101234 500M ohm volume control and line switch (S4)
- R24 13073 15M ohm- $\frac{1}{2}$ w.
- R25 13094 50M ohm- $\frac{1}{2}$ w.
- R26 130218 5M ohm- $\frac{1}{2}$ w.
- R27 13094 50M ohm- $\frac{1}{2}$ w.
- R28 1303 500M ohm- $\frac{1}{2}$ w.
- R29 130172 250M ohm- $\frac{1}{2}$ w.
- R30 1303 500M ohm- $\frac{1}{2}$ w.
- R31 130172 250M ohm- $\frac{1}{2}$ w.
- R32 1307 40M ohm- $\frac{1}{2}$ w.
- R33 13080 150M ohm- $\frac{1}{2}$ w.
- R34 130309 350M ohm- $\frac{1}{2}$ w.
- R35 130172 250M ohm- $\frac{1}{2}$ w.
- R36 130174 50 ohm- $\frac{1}{2}$ w.
- R37 13080 130M ohm- $\frac{1}{2}$ w.

CONDENSERS

- C1 .0005 mica
- C2 .002 x 600 v.
- C3 124143 B.C. Antenna Trimmer
- C4 124143 9 mc. Antenna Trimmer
- C5 .0005 mica.
- C6 .1 x 200 v. Tubular
- C7 129168 .0001 mica
- C8 124138 9 mc. R.F. Trimmer
- C9 124139 B.C. R.F. Trimmer
- C10 10074 .1 x 400 v.
- C11 10074 .1 x 400 v.
- C12 10061 .02 x 600 v.
- C13 1292 .0005 mica
- C14 10061 .02 x 600 v.
- C15 119112 30.0 mid. lyric
- C16 124144 B.C. Oscillator Trimmer
- C17 119112 30.0 mid. lyric x 450 w.v.
- C18 129167 .0002 silver mica
- C19 12938 .0005 mica
- C20 124145 9 mc. Oscillator Trimmer
- C21 119112 10.0 mid. lyric
- C22 11969 16 mid. x 350 w.v.

- 10065 .015 x 600 v.
- 10065 .015 x 600 v.
- 1001 .1 x 400 v.
- 1002 .05 x 200 v.
- 1003 .05 x 400 v.
- 1009 .05 x 200 v.
- 1099 .05 x 200 v.
- 129161 .0001 mica
- 1301 .1 x 200 v.
- 12912 .00025 mica
- 12912 .00025 mica
- 10013 .1 x 400 v.
- 10013 .05 x 400 v.
- 100118 .008 x 600 v.
- 12936 .0003 mica
- 129166 .000125 mica
- 10037 .003 x 600 v.
- 12912 .00225 mica
- C3 and C4 in same unit
- C15, C17 and C21 in same unit
- C29 and C30 in same unit
- PARTS**
- 111207 Loop Antenna Assembly
 - T1 111195 B.C. Antenna Coil
 - T2 111190 9 mc. Antenna Coil
 - T3 111189 6 mc. Antenna Coil
 - T4 111191 12 mc. Antenna Coil
 - T5 111192 15 mc. Antenna Coil
 - T6 10959 9 mc. R.F. Coil
 - T7 10958 6 mc. R.F. Coil
 - T8 10960 12 mc. R.F. Coil
 - T9 10961 15 mc. R.F. Coil
 - T10 10962 B.C. R.F. Coil
 - T11 110161 B.C. Oscillator Coil
 - T12 110157 9 mc. Oscillator Coil
 - T13 110156 6 mc. Oscillator Coil
 - T14 110158 12 mc. Oscillator Coil
 - T15 110159 15 mc. Oscillator Coil