



HARMAN-KARDON MX600

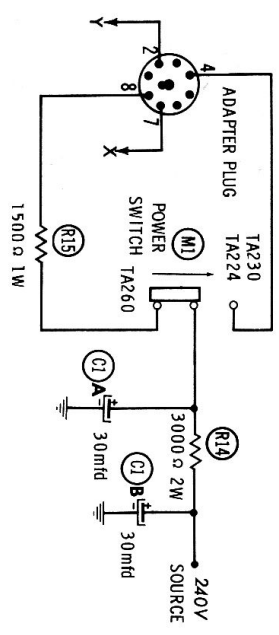

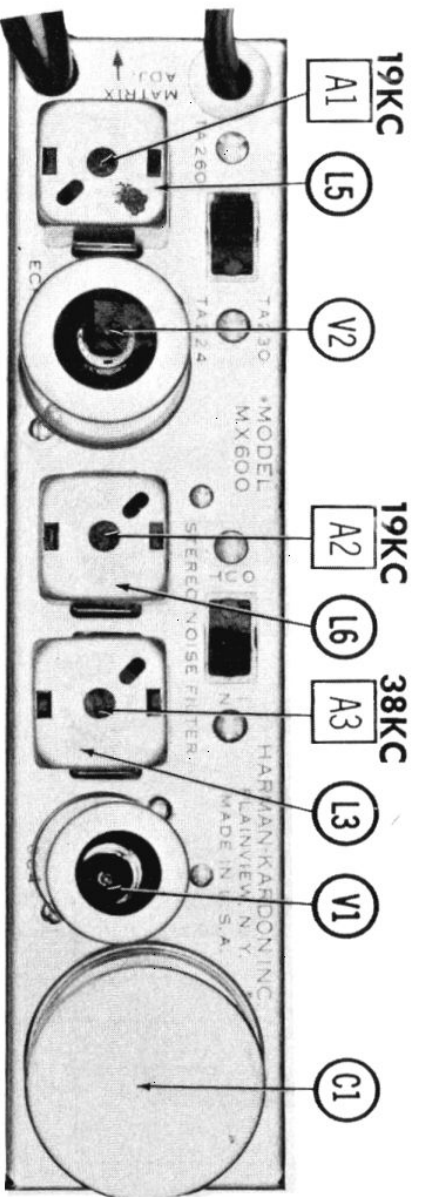

HARMAN-KARDON MX600 ALIGNMENT INSTRUCTIONS

Use only enough generator output to provide a usable indication.
Suggested Alignment Tools: GENERAL CEMENT #5097, 8727... WALSCO #2515

MULTIPLYX ADAPTER ALIGNMENT USING FM STEREO GENERATOR & AUDIO OSCILLATOR

SIGNAL GENERATOR	CONNECT SCOPE	ADJUST	REMARKS
1. 19KC to MPX input, low side to chassis.	Vert. Amp. to pin 2 of V2, low side to chassis.	A1	Adjust for maximum deflection. Set scope to lock in 2 cycles.
2. "	Vert. Amp. to point \diamond A, low side to chassis.	A2	Adjust for maximum deflection of 4-cycle waveform.
3. 67KC to MPX input, low side to chassis.	"	A3, A4	Adjust for MINIMUM deflection.