


# Model 84T-3 A.C. Receiver

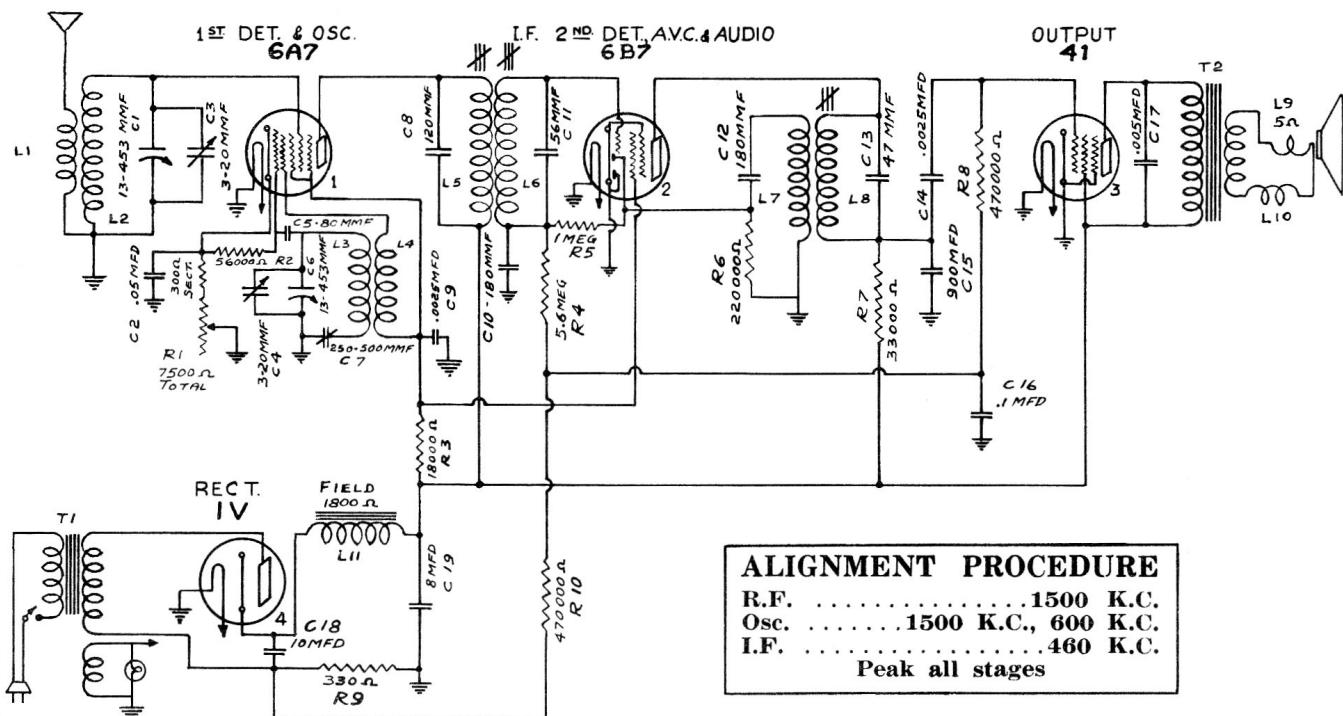

## ALIGNMENT PROCEDURE

R.F. .... 1500 K.C.  
 Osc. .... 1500 K.C., 600 K.C.  
 I.F. .... 460 K.C.  
 Peak all stages

## REPLACEMENT PARTS

Insist on genuine factory tested parts, which are readily identified and may be purchased from authorized dealers.

STOCK No.	DESCRIPTION	STOCK No.	DESCRIPTION
<b>RECEIVER ASSEMBLIES</b>			
S-1664	Antenna-Indoor Antenna approximately 25 ft. long.....	3033	Resistor- 1 Megohm carbon type $\frac{1}{4}$ watt (R5).....
S-1707	Bracket-Dial mounting bracket.....	S-1768	Resistor-5.6 Megohm carbon type 1/10 watt (R4).....
12118	Cap-Grid contact cap.....	12218	Shield-First detector, 6B7 Radiotron shield.....
S-1710	Capacitor-Adjustable capacitor.....	12008	Shield-1st I.F. transformer shield
S-1734	Capacitor- 47 Mmfd (C13).....	12581	Shield-Top for first I.F. transformer shield.....
13307	Capacitor- 56 Mmfd (C11).....	5226	Lamp-Dial lamp
12813	Capacitor- 80 Mmfd (C5).....	11199	Socket-Dial lamp socket.....
12404	Capacitor- 120 Mmfd (C8).....	4794	Socket-Four contact radiotron socket.....
12406	Capacitor- 180 Mmfd (C10,C12).....	4786	Socket-Six contact radiotron socket.....
S-1764	Capacitor- 900 Mmfd (C15).....	3572	Socket-Seven contact radiotron socket.....
5107	Capacitor-.0025 Mfd (C9).....	S-1769	Transformer-First I.F. transformer (L5,L6,C8,C11,C10,R4).....
3932	Capacitor-.0025 Mfd (C14).....	S-1770	Transformer-Second I.F. transformer (L7,L8,C12,C13).....
4868	Capacitor-.005 Mfd (C17).....	S-1771	Transformer-Power transformer-105-125 volt 25 cycle (T1).....
4836	Capacitor-.05 Mfd (C2).....	S-1772	Transformer-Power transformer-105-125 volt 60 cycle (T1).....
4791	Capacitor-.1 Mfd (C16).....	S-1773	Volume control and power switch 7500 ohms (R1,S1).....
S-1765	Capacitor- 8 Mfd (C19).....	<b>REPRODUCER ASSEMBLIES</b>	
11240	Capacitor- 10 Mfd (C18).....	S-1774	Coil Assembly-Comprising field magnet and cone support, less output transformer.....
S-1766	Coil-Antenna coil (L1,L2).....	S-1677	Cone-Reproducer cone.....
S-1719	Coil-Oscillator coil (L3,L4).....	S-1775	Reproducer-complete.....
S-1720	Condenser-Two gang variable tuning condenser (C1,C3,C4,C6).....	S-1676	Transformer-Output transformer (T2).....
12006	Core-Adjustable core and stud for 1st and 2nd I.F. transformers....		
S-1721	Dial-Station selector dial scale..		
S-1727	Knob-Station selector knob.....		
S-1732	Knob-Volume control knob.....		
11670	Resistor-330 ohms-carbon type-1 watt (R9).....		
S-1767	Resistor-18,000 ohms carbon type-3 watt (R3).....		
11669	Resistor-33,000 ohms carbon type-1 watt (R7).....		
12286	Resistor-56,000 ohms Insulated type- $\frac{1}{4}$ watt (R2).....		
5158	Resistor-220,000 ohms carbon type- $\frac{1}{4}$ watt (R6).....		
11172	Resistor-470,000 ohms carbon type- $\frac{1}{4}$ watt (R8,R10).....		