


# De Forest Crosley 1411 Regal, 1412 Royal

## NOTE

VOLTAGES SHOWN ARE APPROX. READINGS THAT SHOULD BE OBTAINED WITH A 1000 OHMS PER VOLT. VOLTMETER. BETWEEN POINT WHERE VOLTAGE IS INDICATED AND GROUND. (CHASSIS)

EXCEPT VOLTAGES THAT ARE MARKED \* WHICH ARE ACTUAL VOLTAGES AND CANNOT BE MEASURED WITH ORDINARY VOLTMETERS

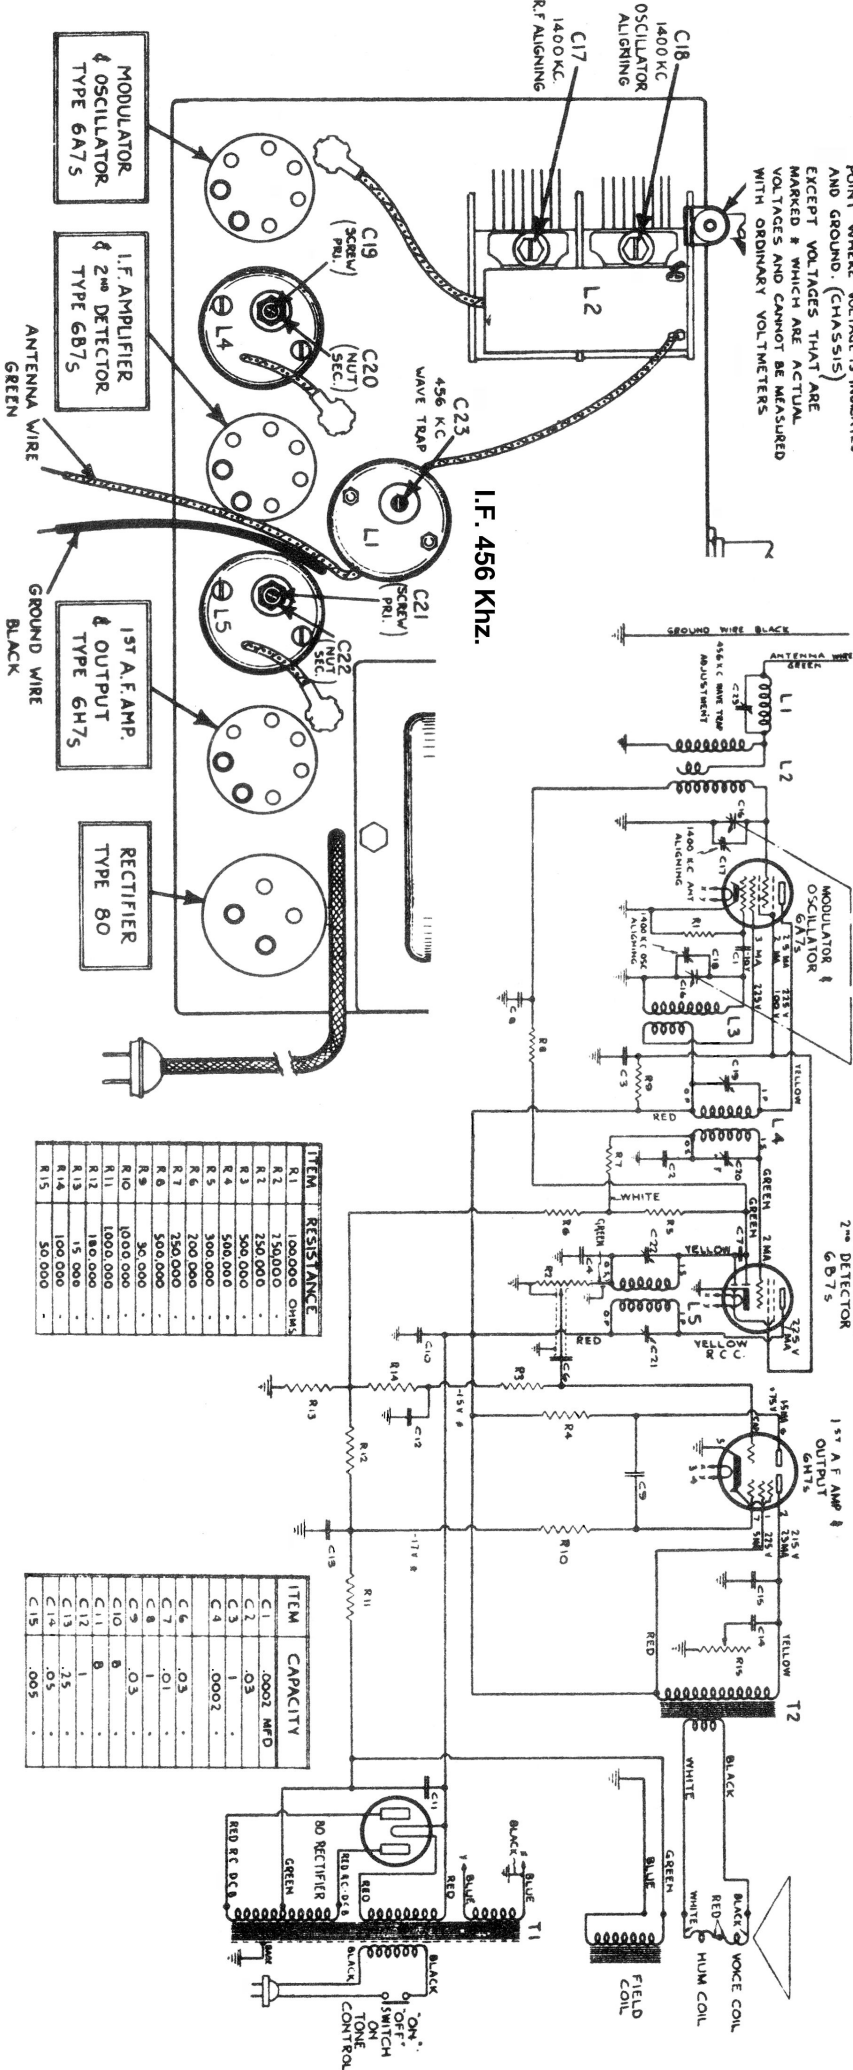

C19, 20, 21 & 22  
456 K C  
I.F. ALIGNING CONDENSERS

I.F. AMPLIFIER &  
2<sup>ND</sup> DETECTOR  
6B7S

1<sup>ST</sup> A.F. AMP. &  
OUTPUT  
6H7S

OUTPUT TRANSFORMER MOUNTED  
ON CHASSIS ON MODEL 1411 &  
ON SPEAKER ON MODEL 1412

| ITEM | RESISTANCE   |
|------|--------------|
| R1   | 100,000 OHMS |
| R2   | 250,000      |
| R3   | 250,000      |
| R4   | 500,000      |
| R5   | 500,000      |
| R6   | 300,000      |
| R7   | 200,000      |
| R8   | 250,000      |
| R9   | 500,000      |
| R10  | 10,000       |
| R11  | 1000,000     |
| R12  | 180,000      |
| R13  | 15,000       |
| R14  | 100,000      |
| R15  | 30,000       |

| ITEM | CAPACITY  |
|------|-----------|
| C1   | .0002 MFD |
| C2   | .03       |
| C3   | 1         |
| C4   | .0002     |
| C5   | .03       |
| C6   | .01       |
| C7   | .01       |
| C8   | 1         |
| C9   | .05       |
| C10  | B         |
| C11  | B         |
| C12  | 1         |
| C13  | .25       |
| C14  | .05       |
| C15  | .005      |