
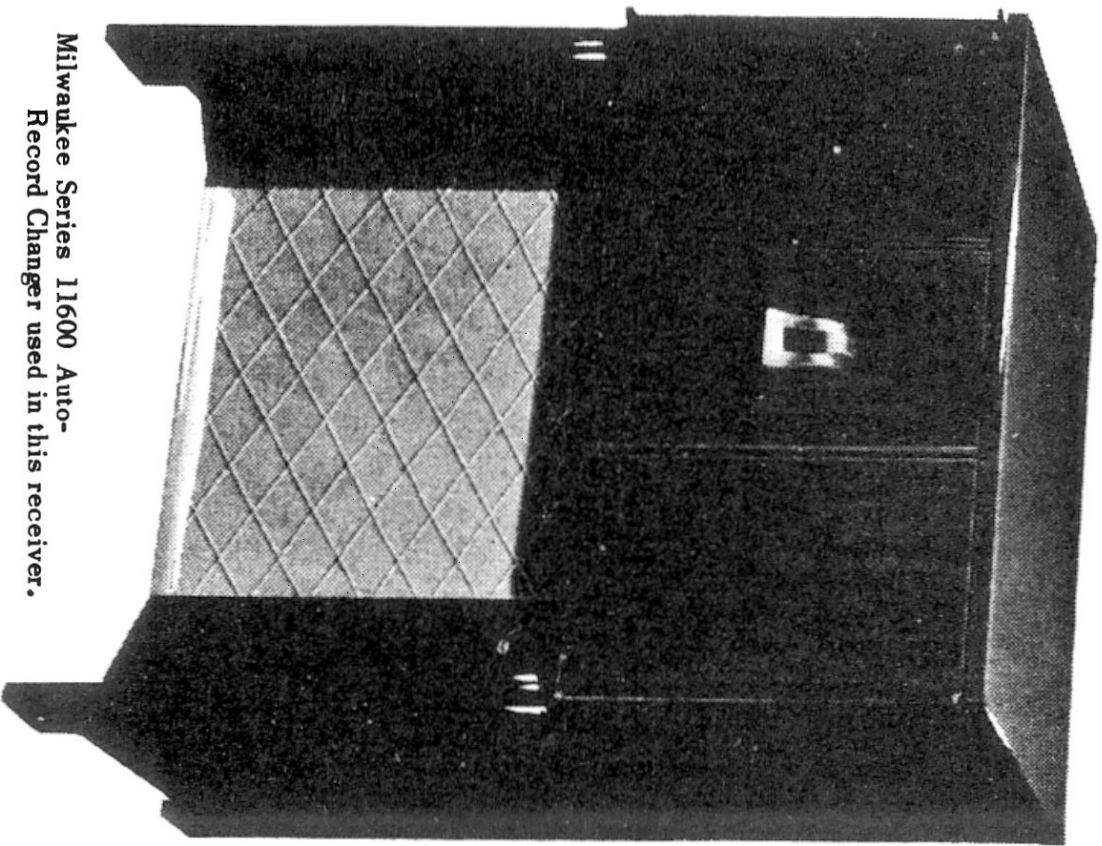


Northern Electric 5401 Radio / Phonograph

ALIGNMENT Northern Electric 5401 Console Radio

Alignment procedure should be carried out to the following table and in the order shown.

Alignment Frequency	Dummy Antenna	Receiver Connection	Items to be adjusted for Max. output.
I.F. 455 KC	.1 mfd (paper)	Antenna Section of gang (rear)	I.F. trimmers C9, C10, C11 and C12 on top of I.F. transformers (tuning gang open).
B.C. 1400 KC	1000 ohms	Antenna Wire	(a) Oscillator trimmers on gang C4 and C5. (b) Antenna trimmer on gang C3.
B.C. 600 KC	1000 ohms	Antenna Wire	(a) Oscillator lag trimmer C8 while rocking gang. (b) Recheck at 1400 KC.

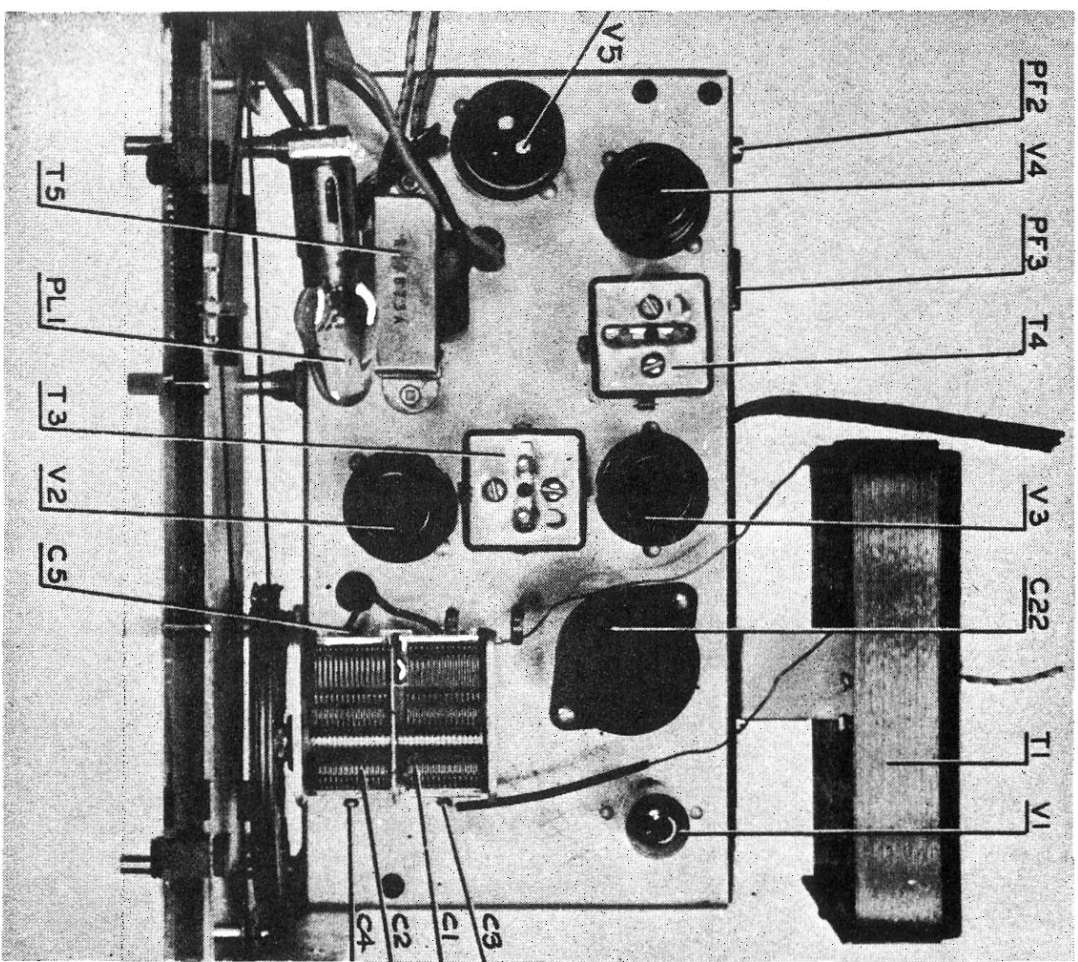

Milwaukee Series 11600 Auto-Record Changer used in this receiver.