



Phonola - Electrohome 9C51-E, 9C51-S, 9C51-P, Z9C51-E, Z9C51-P, Z9C51-S & ZC51-D

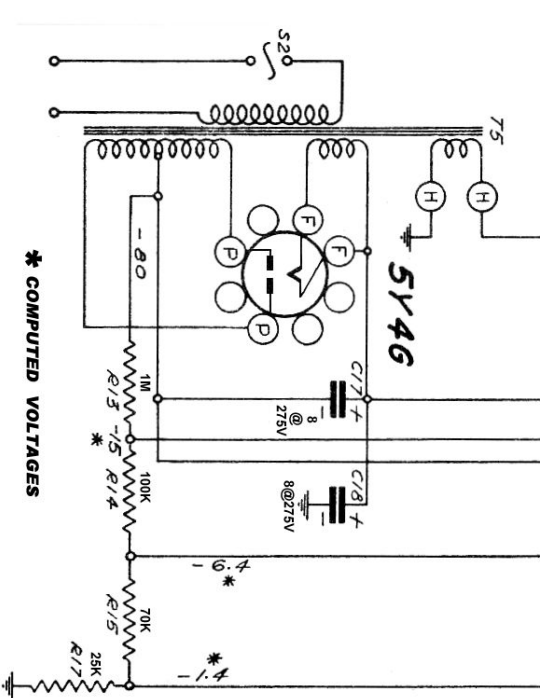

Alignment & Layout

Electrohhome

9C51-E, 9C51-S, 9C51-P, Z9C51-E, Z9C51-P, Z9C51-S & ZC51-D

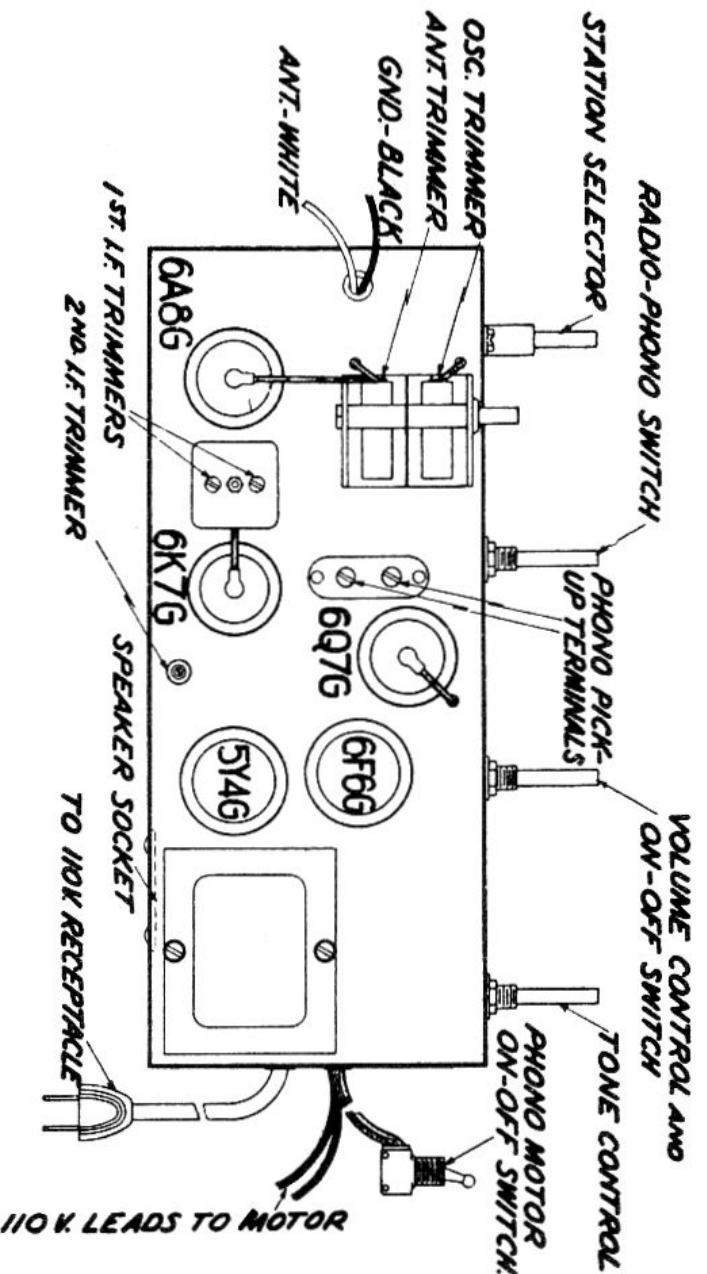

Band	Dummy Antenna	Connect Generator To	Radio Dial Setting	Generator Frequency	Trimmer Adjusted	Adjustment	Note	Approx. Sensitivity
2nd I. F.	.1 Mfd.	Grid of 6K7G I. F. Tube	1700 K. C.	455 K. C.	2nd I. F. C-8	Maximum Output		4000 Microvolts
1st I. F.	.1 Mfd.	Grid of 6A8G 1st Detector	1700 K.C.	455 K. C.	1st I. F. C-6	Maximum Output		150 Microvolts
1460 K. C.	200 Mmfd.	Antenna	1460 K. C.	1460 K. C.	B. C. Osc. C-3 B. C. Ant. C-3	Maximum Output		35 Microvolts
600 K. C.	200 Mmfd.	Antenna	600 K. C.	600 K. C.			Check Only	30 Microvolts