
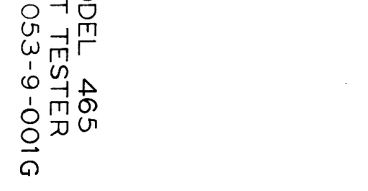
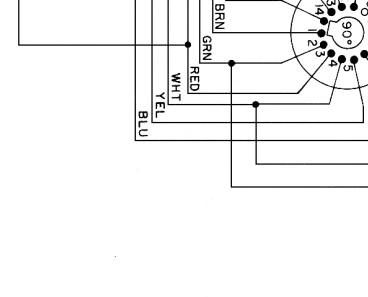
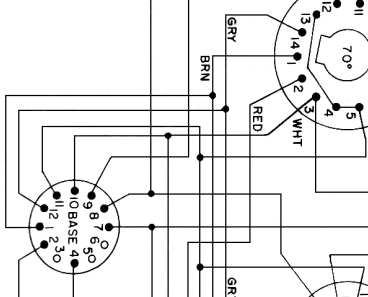
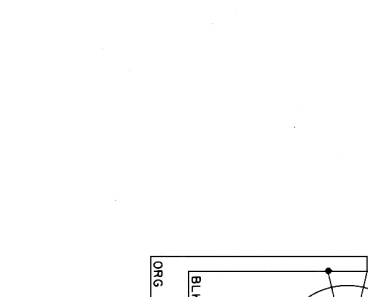


- NOTE:
 1. UNLESS OTHERWISE SPECIFIED ALL RESISTORS IN OHMS, 10%, 1/2 WATT.
 2. SWITCH SW-1 WAFERS VIEWED FROM FRONT. SWITCH SW-5 WAFER VIEWED FROM REAR.
 3. SWITCH POSITIONS
 SW-1 OFF
 SW-2 OFF
 SW-3 NORMAL
 SW-4 R
 SW-5 0-3
 SW-6 ON
 SW-7 OFF
 SW-8 OFF
 SW-9 OFF
 SW-10 OFF
 SW-11 OFF
 SW-12 OFF
 SW-13 OFF
 SW-14 OFF
 SW-15 OFF
 SW-16 OFF
 SW-17 OFF
 SW-18 OFF
 SW-19 OFF
 SW-20 OFF
 SW-21 OFF
 SW-22 OFF
 SW-23 OFF
 SW-24 OFF
 SW-25 OFF
 SW-26 OFF
 SW-27 OFF
 SW-28 OFF
 SW-29 HEATER ADJUST
 SW-30 OFF
 SW-31 OFF
 SW-32 OFF
 SW-33 OFF
 SW-34 OFF
 SW-35 OFF
 SW-36 OFF
 SW-37 OFF
 SW-38 OFF
 SW-39 OFF
 SW-40 OFF
 SW-41 OFF
 SW-42 OFF
 SW-43 OFF
 SW-44 OFF
 SW-45 OFF
 SW-46 OFF
 SW-47 OFF
 SW-48 OFF
 SW-49 OFF
 SW-50 OFF

4. FUNCTION SWITCH SW-1 PANEL MARKING
 1 OFF
 2 HEATER ADJUST
 3 ENDS IN
 5 CUTOFF
5. HEATER SWITCH SW-5 PANEL MARKING
 3 0-3
 4 3-5
 5 5-8
6. AC VOLTAGES ARE RMS.
7. LAST "R" No. 31
 LAST "C" No. 4
 LAST "D" No. 6

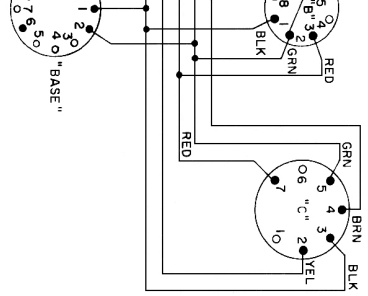

MODEL 465
 CRT TESTER
 488-053-9-001G

ADAPTER TO XV-1

ADAPTER TO XV-1

B&K MODEL 465 PARTS LIST

CAPACITORS

SCHEMATIC SYMBOL	DESCRIPTION	B & K PART No.
C-1} C-2}	5 MFD @ 450V Tubular Electrolytic	021-006-9-001
C-3} C-4}	50 MFD @ 450V Tubular Electrolytic	021-003-9-006

CONTROLS & RESISTORS

R-8	2.4K Ohm 7 watt 5% glass Resistor.....	003-007-5-242
R-12	50K Ohm Carbon Potentiometer	008-001-9-023
R-21	15K Ohm Wire-Wound Potentiometer	009-001-9-004
R-23	20K Ohm Trim Potentiometer	008-056-9-003
R-25	110 Ohm 2% 1/2W Metal Film Resistor	011-102-4-111
R-29	3 Ohm Wire-Wound Potentiometer	009-016-9-001

SWITCHES

SW-1	Function Switch, 10 Pole, 10 Position	083-060-9-001
SW-2	Dynamic Intensifier Switch, SPDT	088-002-9-001
SW-3	Meter Switch, SPDT	084-001-9-001
SW-4	Color Switch, 4PTT	084-001-9-008
SW-5	Heater Switch, 1 Pole, 5 Position	083-061-9-001
SW-6	Life Test Switch, SPDT	091-003-9-001

MISCELLANEOUS

SCHEMATIC SYMBOL	DESCRIPTION	B & K PART No.
D-1, D-2, D-3, D-4, D-6	Silicon Diode 500 PIV 500 Ma.	112-501-0-501
D-5	Germanium Diode 20 PIV 10 Ma.	150-001-9-006
M-1	Meter	320-010-9-002
T-1	Transformer	065-040-9-001
I-1 I-2 I-3	Shorts Indicator, NE-2 Neon Lamp	401-002-9-003
PL-1	Pilot Lamp	401-001-9-002
	Case and Lid	270-006-9-001
	Line Cord	420-001-9-007
	Knob, Heater Adjust	751-002-9-003
	Knob	751-010-9-001
	Red Lens with Tinnerman Nut for Pilot Light....	750-003-9-001
	White Lens with Tinnerman Nut for Shorts Light.	750-003-9-002
	Cable Assembly, 9 Conductor	522-032-9-001
	Black and White Adapter Assembly	521-051-9-001
	Color Adapter Assembly	521-052-9-001
	Carton and Fillers (503-017-9-001)	500-119-9-001
	Instruction Manual	480-071-9-001
	Tube Chart Clip	741-023-9-001

Specify serial number when ordering replacement parts.

Minimum charge \$2.00 per invoice. Orders will be shipped C.O.D. unless previous open account arrangements have been made or remittance accompanies order. Advance remittance must cover postage or express.