

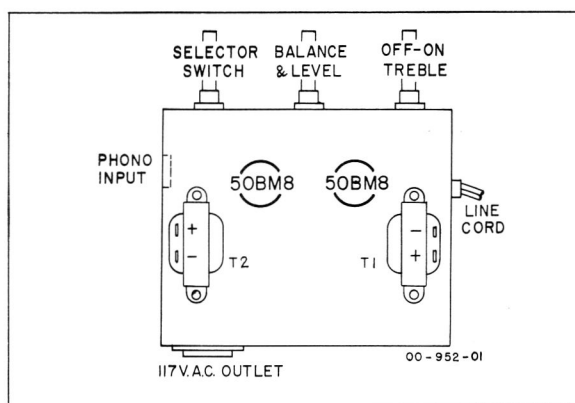
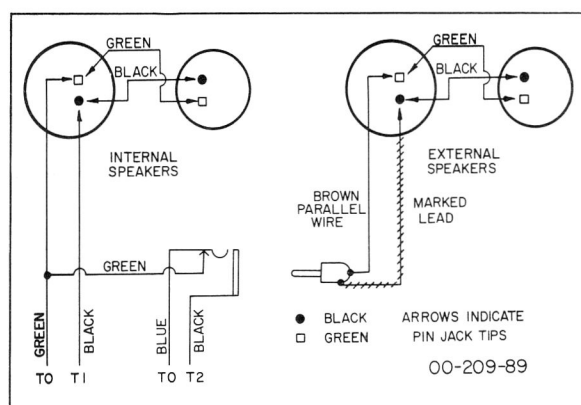
VIKING

Portable Stereo Electric Phonographs

MODEL PAPS-436

4 SPEED, 2 TUBE, AUTOMATIC

Maximum Power Output, 1.5 Watts per channel
Power consumption 45VA

**FINAL ASSEMBLY**

13-118-51	Speaker Enclosure Green & White
13-118-52	Speaker Enclosure Brown & White
19-40003-02	4" Speaker
12-19020-51	Port Phono Case - Green & White
12-19020-52	Port Phono Case - Brown & White
13-68-07	Motorboard
13-119-01	Curtain
16-90010-05	BSR UA8 Changer 60 cycle
16-100010-02	BSR UA8 Changer 25 cycle
16-220002-01	BSR Motor & Mounting Plate
16-250004-03	BSR TC8S Stereo Cartridge
16-120036-01	.7 mil LP Sapphire Stylus
16-120017-02	3 mil 78 Sapphire Stylus
19-40003-01	4" P.M. Speaker

53-40-11	Knob - Selector
53-430-01	Knob - Level-balance
53-40-13	Knob - Off Treble
53-427-03	Knob - Rear
53-141-01	Viking Nameplate
53-432-01	Stereophonic Nameplate

CHASSIS ASSEMBLY

24-80050-01	Output Trans.
26-47-02	Selector Switch
28-9-02	Selenium Rectifier
40-522202-01	Resistor Comp. 22 ohm $\pm$ 20% 2W
40-522212-01	Resistor Comp. 220 ohm $\pm$ 20% 2W
41-120-03	Dual Control - Treble & AC Switch
41-108-04	Dual Control - Level
44-74-01	Electrolytic - Single 40, 40 & 70 x 150 V
42-14-06	Upright Resistor 750 ohms 10W

CAUTION FOR SERVICEMEN

Any serviceman working with this unit when it is out of the cabinet should take special care not to come into contact with any ground connections.

When writing for Service Information, please quote model and serial number. Always order service parts by number. Part numbers are positive identification which ensures fast service and avoids unnecessary delays

Serial number will be found under turntable mat.

THE T. EATON CO. LIMITED
CANADA

