



SERVICE INFORMATION AND PARTS LIST

for the

PCS-459

VIKING

ELECTRIC PHONOGRAPH

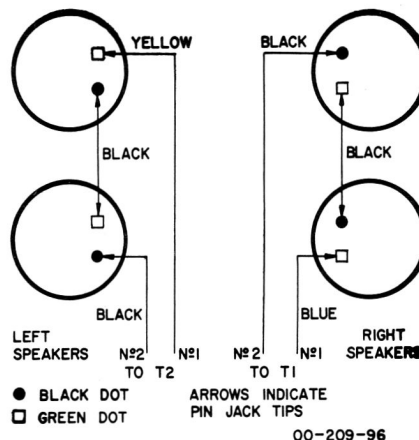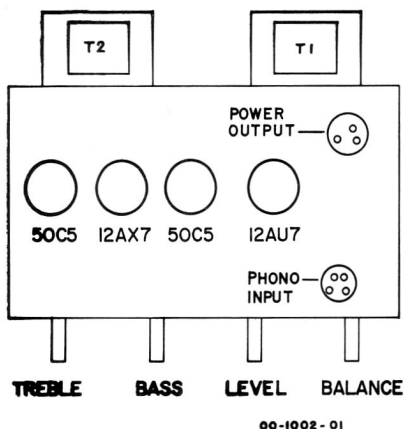

SPECIFICATIONS- Maximum Power Output...3 Watts
Power Consumption.....38 Va.

SERVICE REPLACEMENT PARTS LIST

FINAL ASSEMBLY

16-90018-01 Garrard RC-210 Changer Assembly - 60 cy
16-250015-05 Acos GP73-3 Cartridge
16-120040-04 Replacement Needle
19-60002-02 Speaker - 6" PM, 3.2 ohm
53-426-07 Knob

CHASSIS ASSEMBLY

24-80032-03 Output Transformer 8 ohm VC
28-13-01 Silicon Rectifier
34-59-01 3 Prong AC Socket
40-522201-01 Resistor - Comp. 22 ohm \pm 20% 2W
40-321821-01 Resistor - Comp. 1800 ohm \pm 10% 1W
40-521011-01 Resistor - Comp. 100 ohm \pm 10% 2W
41-38-02 Balance Control - 5M
41-110-03 Dual 2 Meg. Control - Treble, Level, Bass
44-61-01 Electrolytic 40-40-40-30 x 150 V
44-70-01 Electrolytic Single 25 ufd. x 25 V

All information printed in this leaflet is up to date as of May 3, 1960.

Subsequent changes are covered by bulletin.

CAUTION FOR SERVICEMEN

Any serviceman working with this receiver when it is out of the cabinet should take special care not to come in contact with any ground connections.

When writing for Service Information and/or parts, please quote model and Serial Number as found on the license label. Always order service parts by part number. Part numbers are positive identification which ensures fast service and avoids unnecessary delays.

THE T. EATON CO. LIMITED
CANADA



